


FORZA OUTDOOR PEDESTAL FFH 1000 - 1500 mm

COMPONENTS

- Base
- 'T'- Head
- Coller
- Coller Ring
- Extension
- Shims & Spacers for T-Head-3.00 mm



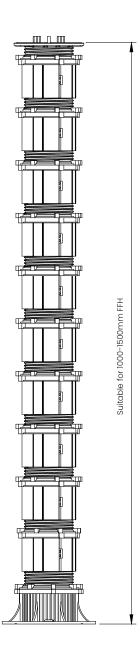



With slope corrector

APPLICATIONS

Forza pedestals can be used for a wide range of outdoor applications, such as poolside decking, outdoor gardens, terraces, industrial flooring, fountains and swimming pool.

MATERIAL & FEATURES

- Polypropylene (PP).
- Manufactured from Polypropylene and are 100% recyclable offering durability and sustainability.
- Designed and manufactured in India.
- UV stable & chemical resistance.
- Inbuilt safety locking mechanism.
- Provision of mechanical fixing if required however larger base area to avoid the screws fixing.
- Temperature range -30° C to 90° C.
- Slope corrector can create or compensate for up to 5% pitch.
- Superior weight resistance and durable that supports 1000 kg per pedestal.

CHARACTERISTICS

Ø 200 Height - 66 mm
Ø 149 Height - 82 mm
Ø 148 Height - 70 mm
Ø 74 Height - 10 mm
Ø 142 Height - 161 mm
Ø 83 Height - 25 mm
Ø 70 Thickness - 1.00 mm
3.754 kg. Approx
Adjustable from 1000 to 1500 mm
Ø234 Height-20
Ø220 Height-20

COMPRESSION TEST

Position	1/1
Height	1000 mm - 1500 mm
Breaking load	544 kg (1199 lbf)

SAFETY INSTRUCTIONS

Forza pedestals are designed to support outdoor raised floors for pedestrian traffic only. The pedestals should not be subjected to dynamic loading, moving and/ or vibrating machinery & equipment, including maintenance, cleaning vehicles, automobiles, other similar equipments and for applications such as sports flooring.

Note:

Unitile has a policy of continuous improvement and reserves the right to modify, revise or change the above specifications without notice. This specification is for descriptive purpose only and is based on the product as on the date of publication of this information.



FORZA OUTDOOR PEDESTAL - COMPONENT & ACCESSORIES

Forza outdoor pedestals can be installed on a wide range of solid and stable substrates, such as concrete slabs, cement screeds, waterproof membranes, and insulation panels. Accessories available for applications with various outdoor finishes, such as granite stone pavers, composite/timber decking, ceramic tiles and fibreglass or metal grating panels.

COMPONENTS







'T'- head



Coller



Shims



Coller ring



Extension



Spacers for T-head

ACCESSORIES



Tile spacer 3.00mm




Perimeter support




Bracing clamp




Spacer for aluminium beam



Spacer for wooden plank



Spacer for wooden plank (Four way)



Aluminium beam 66(W) x 35(h) x 1.8(T)



Bracing pipe



Slope corrector

Note

Unitile has a policy of continuous improvement and reserves the right to modify, revise or change the above specifications without notice. This specification is for descriptive purpose only and is based on the product as on the date of publication of this information.